

LIGHT


LIG 179..

LIG 180..

LIG 285..


LIG 980..

LIG 280..

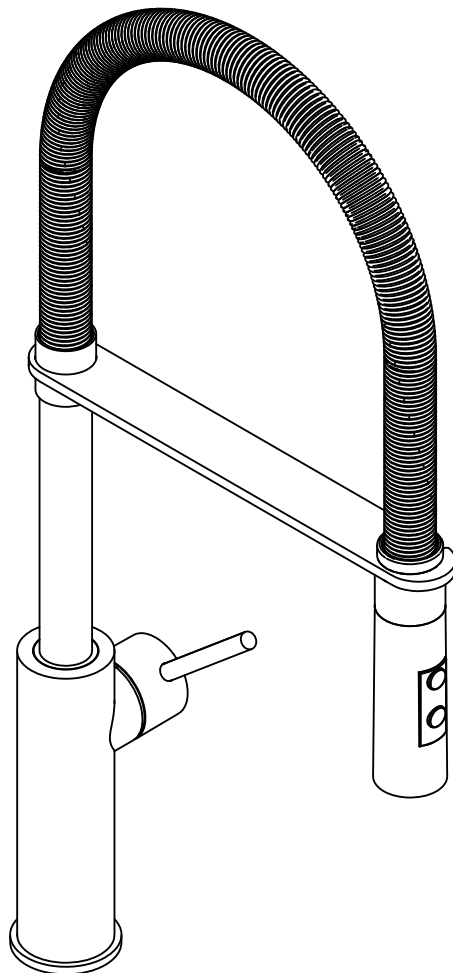

1


Montaggio Assembly

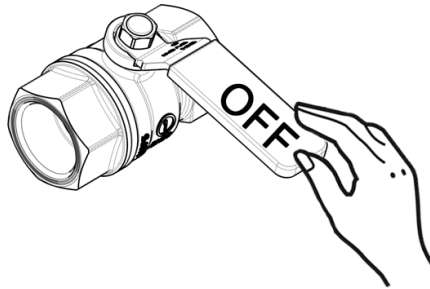

$65 \pm 5^{\circ}\text{C}$



$15 \pm 5^{\circ}\text{C}$




MIN - MAX



OK


2

280
179
180
980

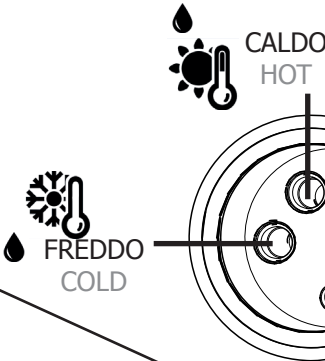


280
179
180
980


a

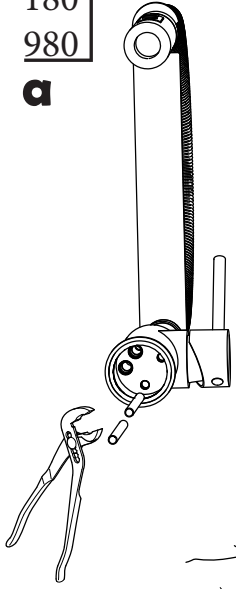


b

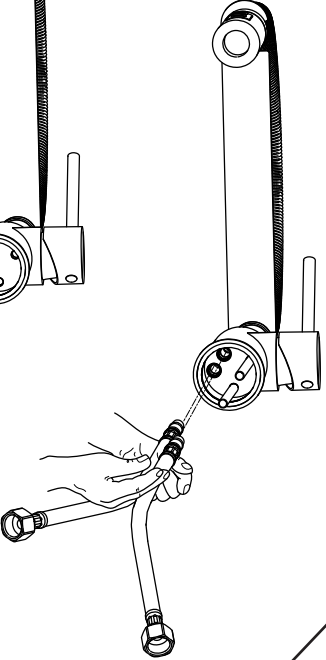

b

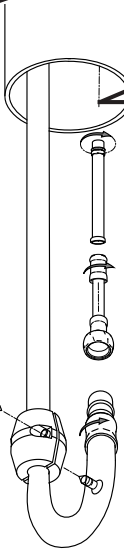

a




CALDO
HOT





FREDDO
COLD

285

C

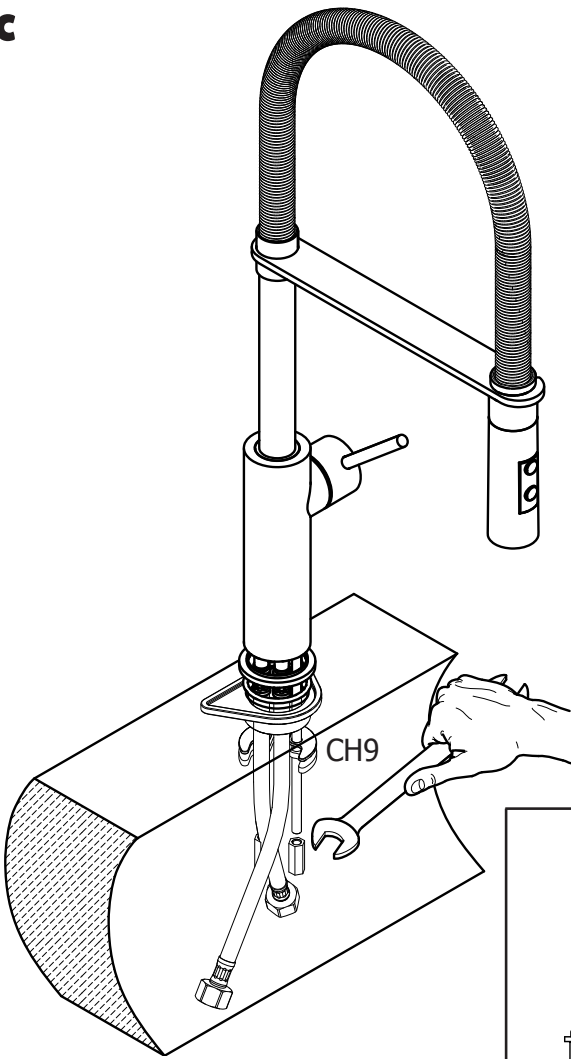


280
179
180
980

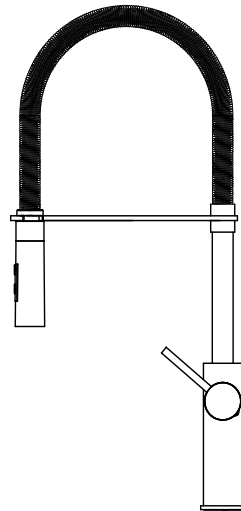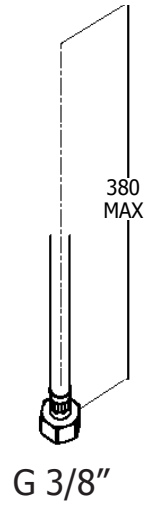


40 MAX

Ø 33,5 MIN
Ø 37 MAX





Funzionamento
Working

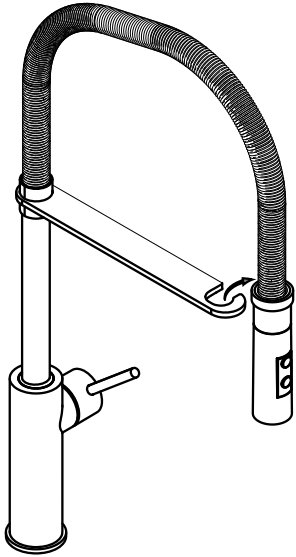

179

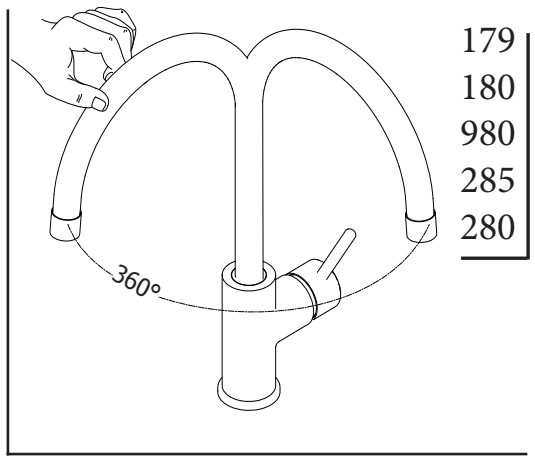


179
180
980
285
280

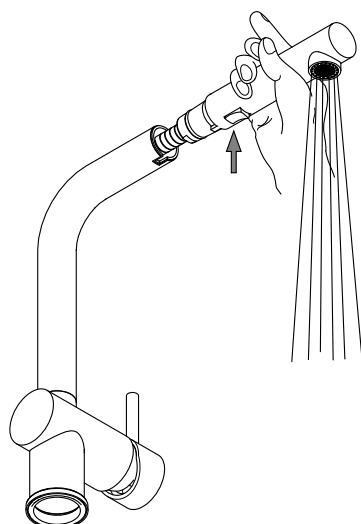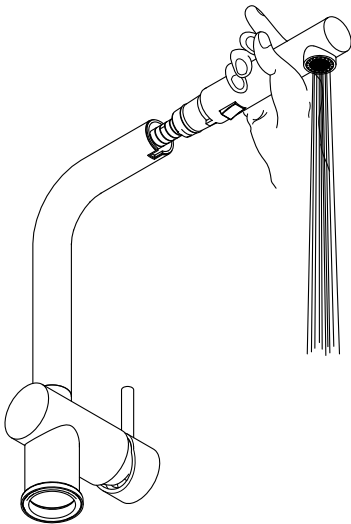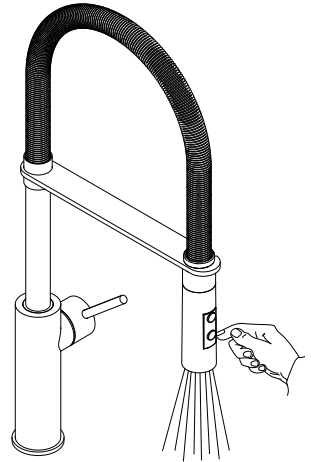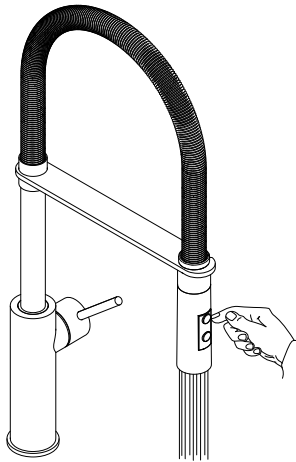

285


M

Manutenzione Service

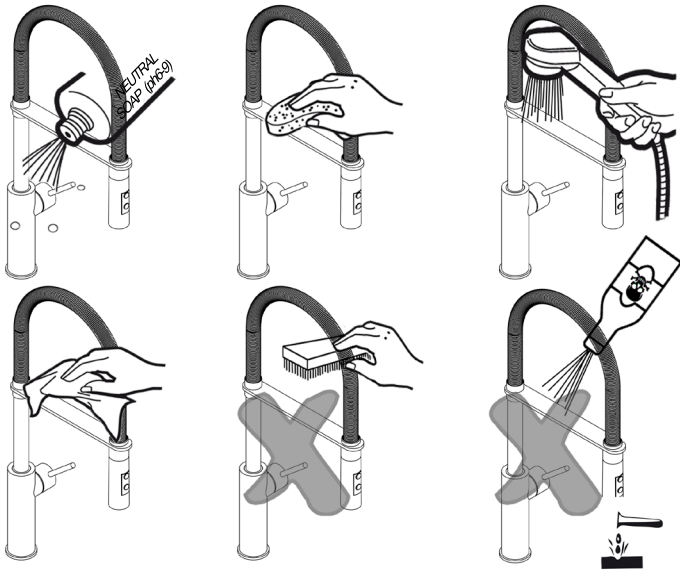

S

Sostituzione Cartuccia How to replace Cartridge

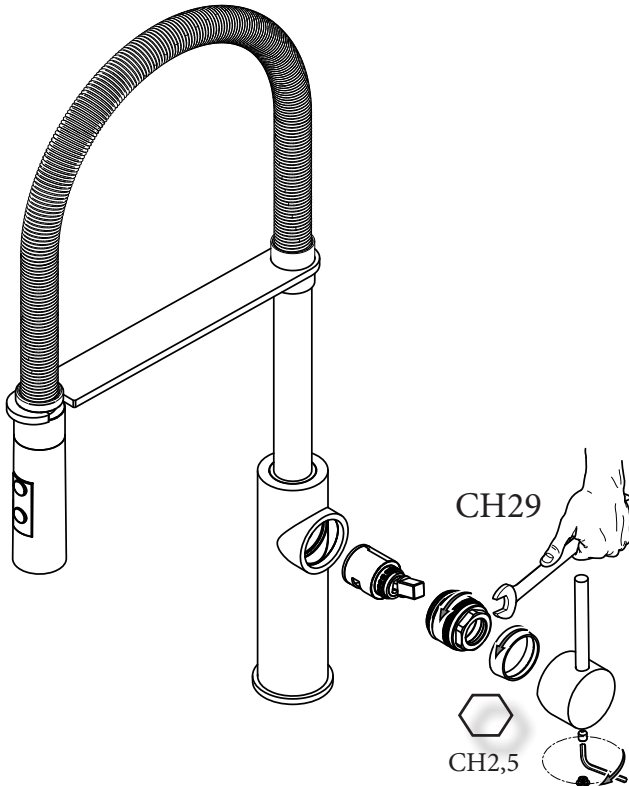


179

180



980

280


C

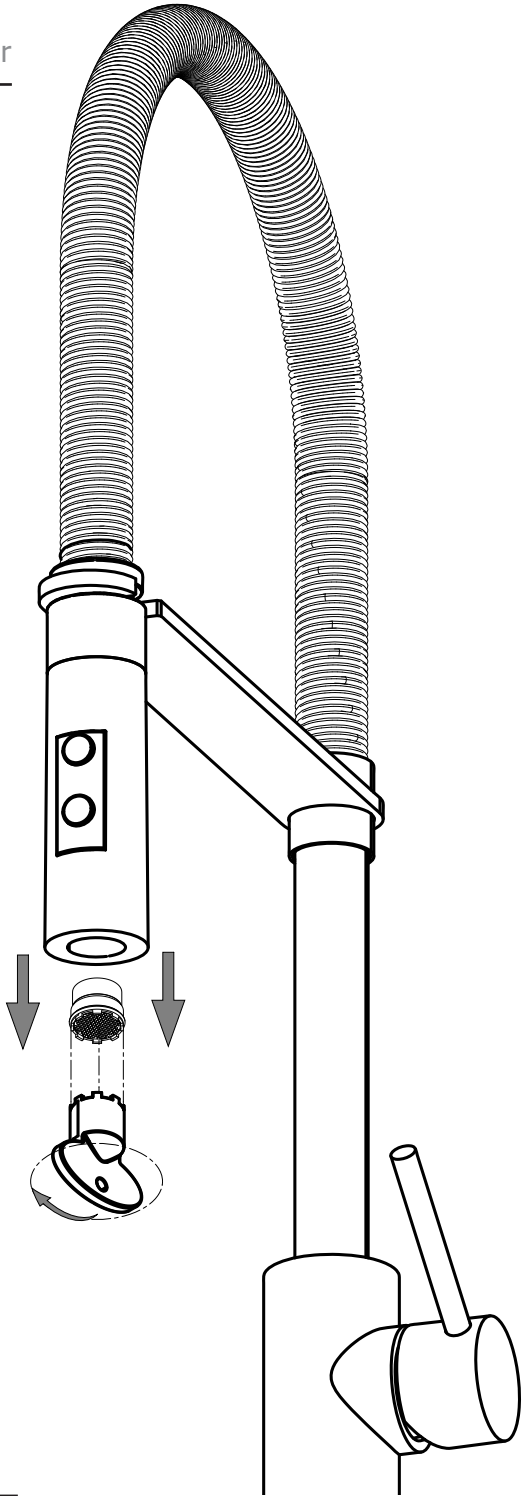

CH13

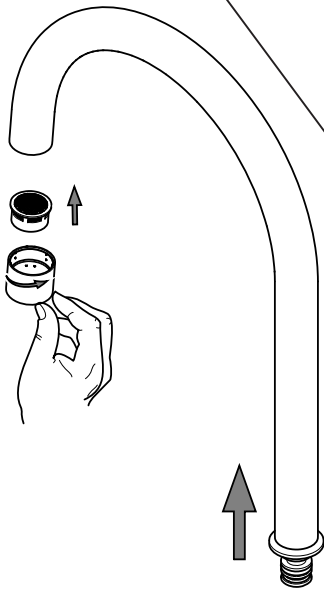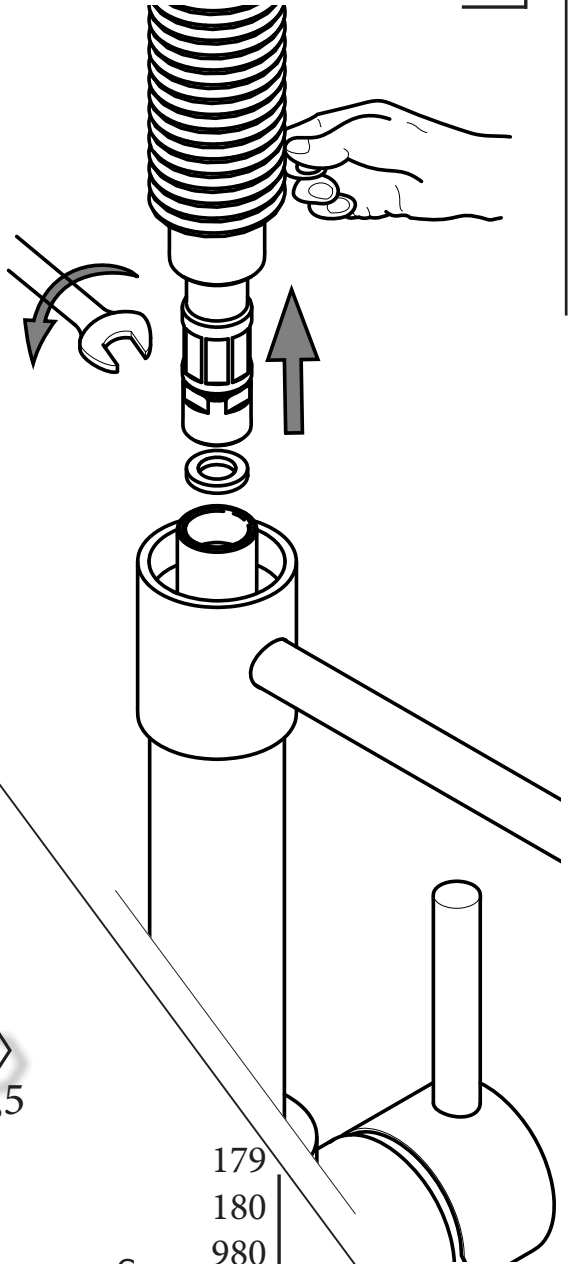

CH2,5



	179	
	180	
Canna	980	
Spout	280	180
		980
Aeratore		285
Aerator		280