


light

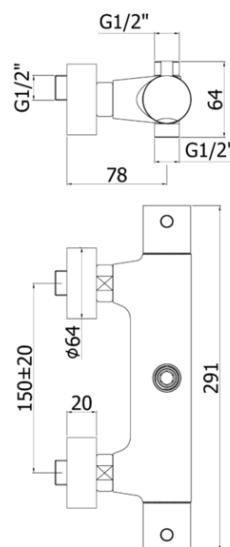

DESCRIZIONE | DESCRIPTION

- Miscelatore termostatico doccia (2 uscite) completo di:
- set 2 eccentrici 1/2"x3/4"G e rosoni
- con attacchi 1/2"G
- Thermostatic shower mixer (2 outlets) complete with:
- set of 2 S-wall-unions 1/2"x3/4"G and wall-plates
- with 1/2"G connections

FINITURE | FINISHES

LIQ 169..

- CR - Cromo | Chrome
- BO - Bianco opaco | Matt white
- NO - Nero opaco | Matt black
- HG - Honey gold | Honey gold finish
- HGSP - Honey gold spazzolato | Brushed honey gold finish
- ST - Steel looking | Steel looking finish

ARTICOLO | ARTICLE

LIQ 169..

- senza set doccia
- con cartuccia deviatore (2 uscite + stop)
- without shower set
- with diverter cartridge (2 outlets + stop)

RAPPORTO PROVA PORTATA | FLOW RATE REPORT

	Uscita outlet	Pressione / Pressure (bar)									
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)	uscita sopra - up outlet	7.04	10.1	12.39	14.5	16.16	17.77	19.25	20.6	21.88	23.06
	uscita sotto - under outlet	8.84	12.67	15.43	17.91	20.02	21.87	23.71	25.29	26.9	28.4

DOCUMENTI TECNICI | TECHNICAL DOCUMENTS

DIAGRAMMA
PORTATA 1ISTRUZIONI
INSTALLAZIONEESPLOSO
RICAMBI
LIQ 169