


## light

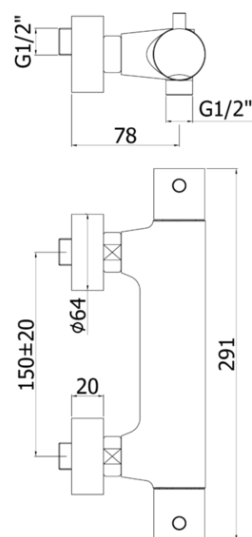

## DESCRIZIONE | DESCRIPTION

- Miscelatore termostatico doccia completo di:
  - limitatore di portata ECOSTOP
  - set 2 eccentrici 1/2"x3/4"G e rosoni
- Thermostatic shower mixer complete with:
  - ECO-STOP flow reducer
  - set of 2 S-wall-unions 1/2"x3/4"G and wall-plates

## FINITURE | FINISHES

## LIQ 168E..

- CR - Cromo | Chrome
- BO - Bianco opaco | Matt white
- NO - Nero opaco | Matt black
- HG - Honey gold | Honey gold finish
- HGSP - Honey gold spazzolato | Brushed honey gold finish
- ST - Steel looking | Steel looking finish

## LIQ 168ED..

- CR - Cromo | Chrome
- BO - Bianco opaco | Matt white
- NO - Nero opaco | Matt black
- HG - Honey gold | Honey gold finish
- HGSP - Honey gold spazzolato | Brushed honey gold finish
- ST - Steel looking | Steel looking finish

## ARTICOLO | ARTICLE

## LIQ 168E..

- senza set doccia
- con attacco inferiore 1/2"G
- without shower set
- with 1/2"G lower connection

## LIQ 168ED..

- con supporto a muro snodato in metallo
- con doccia e flessibile
- with metal joint wall bracket
- with hand-shower and flexible hose

## RAPPORTO PROVA PORTATA | FLOW RATE REPORT

	Uscita outlet	Pressione / Pressure ( bar )									
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate ( l / min )		5.71	8.24	10.17	11.68	12.98	14.15	15.24	16.28	17.16	18.1

## DOCUMENTI TECNICI | TECHNICAL DOCUMENTS

DIAGRAMMA  
PORTATA 1ISTRUZIONI  
INSTALLAZIONEESPLOSO  
RICAMBI  
LIQ 168EESPLOSO  
RICAMBI  
LIQ 168ED

Sito Web



www.paffoni.it