


light

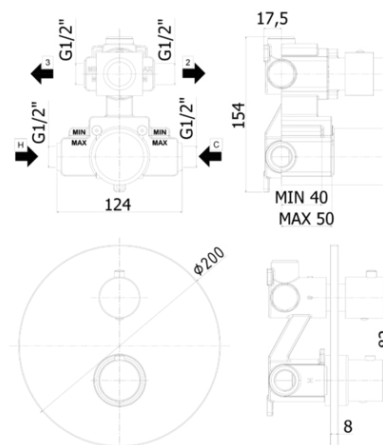

DESCRIZIONE | DESCRIPTION

- Miscelatore termostatico incasso doccia (2 uscite) completo di:
 - piastra in metallo Ø200mm
 - attacchi 1/2"G
- Concealed thermostatic shower mixer (2 outlets) complete with:
 - metal wall plate Ø200mm
 - 1/2"G connections

FINITURE | FINISHES

LIQ 018..

- CR - Cromo | Chrome
- BO - Bianco opaco | Matt white
- NO - Nero opaco | Matt black
- HG - Honey gold | Honey gold finish
- HGSP - Honey gold spazzolato | Brushed honey gold finish
- ST - Steel looking | Steel looking finish

ARTICOLO | ARTICLE

LIQ 018..

- con cartuccia deviatore (2 uscite + stop)
- with diverter cartridge (2 outlets + stop)

RAPPORTO PROVA PORTATA | FLOW RATE REPORT

	Uscita outlet	Pressione / Pressure (bar)									
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)	uscita destra - right outlet	6.48	9.66	12.07	14.08	15.9	17.5	19.06	20.47	21.79	22.98
	uscita sinistra - left outlet	6.31	9.47	11.75	13.78	15.94	17.68	19.16	20.41	21.83	23

DOCUMENTI TECNICI | TECHNICAL DOCUMENTS



DIAGRAMMA
PORTATA 1



ISTRUZIONI
INSTALLAZIONE



ESPLOSO
RICAMBI
LIQ 018

